

HYDRAULIC WET KIT OR PTO PROVIDED BY CUSTOMER

HYDRAULIC SPECIFICATIONS



- 15-17 GPM @ 2000 PSI PEAK PRESSURE
 - TRUCK ENGINE RPM 1,500 MAXIMUM
 - RELIEF VALVE INSTALLED, SET AT 2000 PSI
 - 30 GALLON RESERVOIR FILLED W/OIL
 - 1/2" NPT FOR HYDRAULIC HOOK UP
- ## TRUCK PTO DRIVE
- 60-80% OF ENGINE SPEED
 - #60 ROLLER CHAIN RECOMMENDED
 - JACK SHAFT-60B16 SPROCKET
 - 3500 DRIVE-60B30 SPROCKET, 1-1/4" BORE, 1/4" KEY

Select truck with axle, frame and horsepower configuration that match box capacities. Always follow Federal, State and local laws for lighting, weight and operation. Be sure box is located on the truck to provide safe weight distribution on the truck.

LIGHTING SPECIFICATIONS

HIGHWAY LIGHT PACKAGE RECOMMENDED FOR ON ROAD TRANSPORT

SUPPLY A 7-PIN MALE & FEMALE PLUG OFF OF THE REAR OF THE CAB FOR LIGHT HOOK UP TO IMPLEMENT, LOCATED CENTRALLY BEHIND THE CAB. ORDER FROM MEYER #56-0005-2 & 56-0014-1.

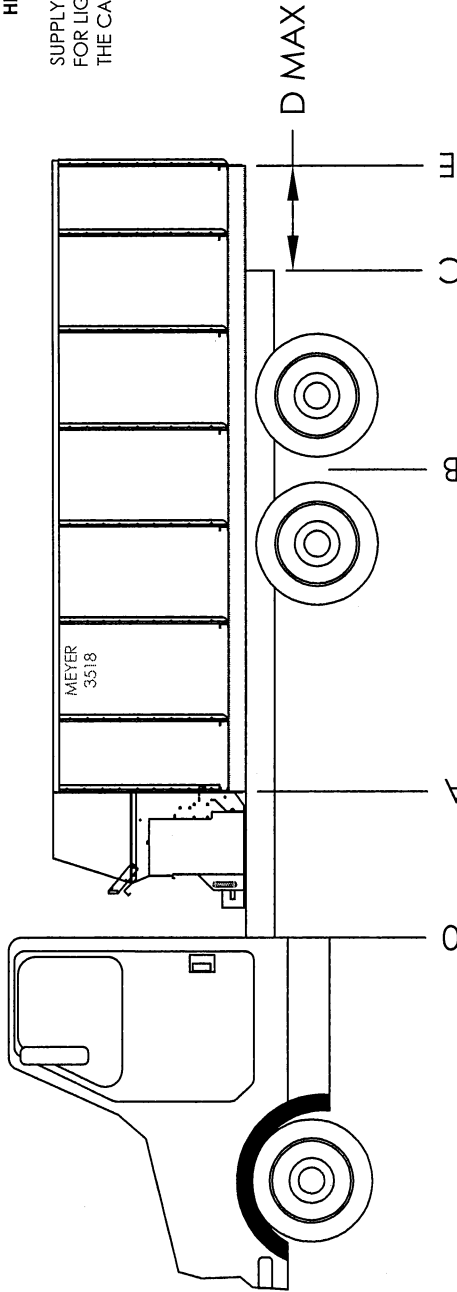

TAIL LIGHT CONVERTER

DEPENDING ON MAKE AND MODEL OF TRUCK IT MAY BE NECESSARY TO INSTALL A LIGHT CONVERTER, MEYER #56-0028. CONVERTER ALLOWS SIGNAL LIGHTS AND BRAKE LIGHTS TO OPERATE ACCORDING TO DOT LIGHTING REGULATIONS.

DIMENSION B-CENTER OF AXLE OR TRUNION

SIZE	A	B	C	D	E
3516	50"	148"	204"	38"	242"
3518	50"	160"	228"	38"	266"

NAME	DATE	MEYER MFG CORP.	
DRAWN BY	2/26/2014		
CHECKED			
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ± 1/32" ANGULAR: BEND ± 0.5° TWO PLACE DECIMAL ± 0.02" THREE PLACE DECIMAL ± 0.005"		MATERIAL: 3500 TRUCK MOUNT	
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MEYER MFG CORP. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MEYER MFG CORP. IS PROHIBITED.		SIZE	REV.
		A	-
		DWG. NO.	
		3500 TRUCK MOUNT	
SCALE: 1:1	WT:	SHEET 1 OF 1	