




# Ag Trailers

## Tandem or Tridem



# Maximum Maneuverability and Traction with a Meyer Ag Trailer!

- 16-45 ton Models
- Tandem or Tridem
- Oscillating or Suspension Axles
- Steering
- Scale Systems
- Hydraulic and Air Brake Packages
- Hitch Choices and More!

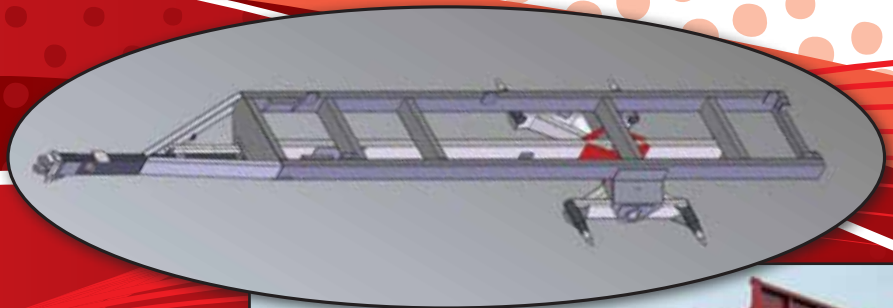

**Nobody Offers You More Trailer Choices**

MEMBER



**Farm Equipment Buyers Trust The Name Meyer!**





**XTSS2200XL**  
Suspension axle with rear steer



h  
You



**XT2200**

**XT1600 and XT2200 Models**

**Oscillating Tandem**

- 8 bolt ag hubs on XT1600  
3x6 tubular frame
- 10 bolt ag hubs on XT2200  
4x8 tubular frame
- Fixed clevis hitch standard  
swivel optional (XT2200)



**XTS2200**

**XTS2200 Model**

**Suspension Tandem**

Designed for today's higher speed farm tractors.

- Hydraulic lever, foot pedal or air brakes available (opt)
- 25,000# axles w/suspension and oil bath hubs
- Swivel hitch standard



**XTSS2200**



**XTSS2200 (tandem) / XTSS4500 (tridem) Models**

**Suspension & Steering**

Designed for today's higher speed farm tractors.

- Features a caster steering system (self-steering) w/steering lockout and brakes available
- Heavy duty spring suspension - 33,000# axle rating
- Rear axle steer on tandem/front and rear steer on tridem



# as a Trailer to Match Application!



**XT1600L**  
Oscillating axle w/riser



**XT2200XL**



**XT2200**

## Massive Frames

All Meyer Trailers feature a tubular frame for strength and a finished appearance.

- 3x6 on XT1600 models
- 4x8 on 2200 and 4500 models
- Frame lengths vary depending on application (see specs)



**XTSS4530**  
Suspension axle  
w/front and  
rear steer

Pictured with optional eyebrow fenders.

• **Maneuverability & Control**





# AG TRAILER SPECIFICATIONS



Model	Style	Capacity (Trailer & Load)	Tread Width	Spindle Size	Heavy Duty Hubs	Frame Design	Weight	Overall Length	Bed Length	Overall Width	Bed Width	Stake Spacing	Bed Height	Bed Height	Adj. Clevis Hitch	Surge Brakes	Swivel Clevis Hitch	4" Riser Package	Various Tire Sizes	Safety Chain
XT 1600	Tandem O-Beam	32,000 lbs.	81.25" w/16.5L 81.4" w/425/65 85" w/11R22.5	3"	8 Bolt 6000# at 10 MPH	3x6x1/2" Tubing	3145# w/riser w/425/65x22.5	20' 8 1/2"	13' 7"	100 1/2" w/16.5L 98 3/4" w/425	42"	42"	32" w/14L w/o riser 38 1/2" w/425 w/riser	32" w/14L w/o riser 38 1/2" w/425 w/riser	Standard	N/A	N/A	Opt-Req. for 16.5L, 19L or 425/65	See Dealer	Opt
XT 1600-L	Tandem O-Beam	32,000 lbs.	81.25" w/16.5L 81.4" w/425/65 85" w/11R22.5	3"	8 Bolt 6000# at 10 MPH	3x6x1/2" Tubing	3240# w/riser w/425/65x22.5	24'	16' 10 1/2"	100 1/2" w/16.5L 98 3/4" w/425	42"	42"	32" w/14Lx16.1 w/o riser 38 1/2" w/425 w/riser	32" w/14Lx16.1 w/o riser 38 1/2" w/425 w/riser	Standard	N/A	N/A	Opt-Req. for 16.5L, 19L or 425/65	See Dealer	Opt
XT 2200	Tandem O-Beam	44,000 lbs.	82" w/21.5L 82" w/425/65	3 1/2"	10 Bolt 15,000# at 10 MPH	4x8x1/2" Tubing	3680# w/21.5Lx16.1	25' 5 1/2"	18'	102 1/2" w/21.5L 98 1/2" w/425	42"	42"	44" w/21.5L 43 3/4" w/425	44" w/21.5L 43 3/4" w/425	Standard	Opt	Opt	N/A	See Dealer	Opt
XT 2200-L	Tandem O-Beam	44,000 lbs.	82" w/21.5L 82" w/425/65	3 1/2"	10 Bolt 15,000# at 10 MPH	4x8x1/2" Tubing	3810# w/21.5Lx16.1	27' 5 1/2"	20'	102 1/2" w/21.5L 98 1/2" w/425	42"	42"	44" w/21.5L 43 3/4" w/425	44" w/21.5L 43 3/4" w/425	Standard	Opt	Opt	N/A	See Dealer	Opt
XT 2200-XL	Tandem O-Beam	44,000 lbs.	82" w/21.5L 82" w/425/65	3 1/2"	10 Bolt 15,000# at 10 MPH	4x8x1/2" Tubing	3950# w/21.5Lx16.1	30' 5 1/2"	22'	102 1/2" w/21.5L 98 1/2" w/425	42"	42"	44" w/21.5L 43 3/4" w/425	44" w/21.5L 43 3/4" w/425	Standard	Opt	Opt	N/A	See Dealer	Opt

Model	Style	Suspension	Capacity (Trailer & Load)	Tread Width	Axle Configuration	Heavy Duty Hubs	Max Speed (Depends on Tires)	Frame Design	Bed Width	Stake Spacing	Bed Height	Overall Width w/600/50x22.5	Overall Length	Bed Length	Hitch and Hitch Supports	Adj. Swivel Clevis Hitch	Weight Approx.	Tires	Brakes	Safety Chain
XTS 2200	Tandem w/ suspension	Leaf Spring	48,000#	83" w/600 /50x22.5	Tandem-non steer 25,000# x 2-High Speed	10 Bolt - Oil bath	40 mph	4x8 Tubular	42"	33 1/2" Std 42" Opt	44" w/600 /50x22.5	106 1/2"	25' 5 1/2"	18'	Extra HD	Standard	5,540# w/600/50x22.5	600/50x22.5 High Float 425/65x22.5 w/Alum. 11R22.5 Dual Wheels	Hydraulic Manual Hyd. Foot Pedal Air	Opt
XTS 2200L	Tandem w/ suspension	Leaf Spring	48,000#	83" w/600 /50x22.5	Tandem-non steer 25,000# x 2-High Speed	10 Bolt - Oil bath	40 mph	4x8 Tubular	42"	33 1/2" Std 42" Opt	44" w/600 /50x22.5	106 1/2"	27' 5 1/2"	20'	Extra HD	Standard	5,670# w/600/50x22.5	600/50x22.5 High Float 425/65x22.5 w/Alum. 11R22.5 Dual Wheels	Hydraulic Manual Hyd. Foot Pedal Air	Opt
XTS 2200XL	Tandem w/ suspension	Leaf Spring	48,000#	83" w/600 /50x22.5	Tandem-non steer 25,000# x 2-High Speed	10 Bolt - Oil bath	40 mph	4x8 Tubular	42"	33 1/2" Std 42" Opt	44" w/600 /50x22.5	106 1/2"	30' 5 1/2"	22'	Extra HD	Standard	5,800# w/600/50x22.5	600/50x22.5 High Float 425/65x22.5 w/Alum. 11R22.5 Dual Wheels	Hydraulic Manual Hyd. Foot Pedal Air	Opt

Model	Style	Suspension	Capacity (Trailer & Load)	Tread Width	Axle Configuration	Heavy Duty Hubs	Max Speed (Depends on Tires)	Frame Design	Bed Width	Stake Spacing	Bed Height	Overall Width	Overall Length	Bed Length	Hitch and Hitch Supports	Articulating Imp. Hitch	Weight Approx.	Tires	Brakes	Safety Chain
XTSS 2226	Tandem Suspension Steerable	Leaf Spring	54,000#	88.5" w/600 /50x22.5	Tandem - steerable 33,000# x 2 High Speed	10 Bolt - Grease Filled	40 mph	4x8 Tubular	42"	33 1/2" Std	48" w/600 /50x22.5	110"	29' 9"	22 1/2"	Extra HD	Std. Requires 1 1/2" or 2" pin Hammerstep style hitch	7,960# w/600 /50x22.5	800/50x22.5 High Flat 700/40x22.5 High Flat	Hydraulic Manual Hyd. Foot Pedal Air	Opt
XTSS 4530	Tridem Suspension Steerable	Leaf Spring	90,000#	96.5" w/700 /40x22.5	Tridem - steerable 33,000# x 3 High Speed	10 Bolt - Grease Filled	40 mph	4x8 Tubular	42"	33 1/2" Std	47" w/700 /40x22.5	124"	34'	26' 9"	Extra HD	Std. Requires 1 1/2" or 2" pin Hammerstep style hitch	12,660# w/600 /50x22.5	800/50x22.5 High Flat 700/40x22.5 High Flat	Hydraulic Manual Hyd. Foot Pedal Air	Opt
XTSS 4536	Tridem Suspension Steerable	Leaf Spring	90,000#	96.5" w/700 /40x22.5	Tridem - steerable 33,000# x 3 High Speed	10 Bolt - Grease Filled	40 mph	4x8 Tubular	42"	33 1/2" Std	47" w/700 /40x22.5	124"	40' 3"	32' 9"	Extra HD	Std. Requires 1 1/2" or 2" pin Hammerstep style hitch	13,100# w/600/50x22.5	800/50x22.5 High Flat 700/40x22.5 High Flat	Hydraulic Manual Hyd. Foot Pedal Air	Opt



**Meyer Crop Max Spreader with Suspension Style Trailer**

**Scale Packages**  
Available in combination with most trailer and wagon arrangements.

**Meyer Mfg. Corp.**  
Dorchester, Wisconsin 54425  
Phone: 715/654-5132 • FAX: 715/654-5513 • 1-800-325-9103  
email: sales@meyermfg.com • home page: www.meyermfg.com  
American Made • American Owned



**Articulating Imp. Hitch**  
XTSS2226, XTSS4500 • Std  
XT2200, XTSS2200 • Opt  
\*Requires hammerstep drawbar

**HD Swivel, Adj. Clevis**  
XTSS2200 Models • Std  
XT2200 Models • Opt

**HD Adjustable Clevis**  
XT2200 Models • Std

YOUR DEALER IS:



Scan the code with your smartphone and instantly visit us online!



Capacities apply only when equipped with properly rated tires. Meyer Mfg. reserves the right to change its products or this description at any time without notice or obligation.