



# Farm Wagons

## Single Axle Tandem Axle



16 ton and larger units feature a 3x5 inner tongue with length adjustment and double bolt attachment for added strength.

Heavy Duty Telescoping Tongue - Standard on All Models

## Torture Tested And Field Proven For Your Satisfaction

### Ten Models To Choose From 8 - 22 Ton Capacity



All Models (except X804) are equipped with this **Massive Steering System**:


- 1" thick pivot plate
- greasable king pin and tongue bolt
- 1 piece, solid tie rod shaft (1 1/4" diameter!)
- HD block steering stops
- 4x8 tubular bolster



- Adjustable Tongue with 1.5" attaching bolt.
- Constructed to accommodate today's high horsepower applications.
- Spring assisted tongue standard on all models.
- 4"x 8" Tubular (not welded) Bolsters standard on all models. (4x10 on X2004)

#### Flexibility & Strength

**C-section reach** is standard on all Meyer Wagons. No rotating collars to wear out.



MEMBER



**Farm Equipment Buyers Trust The Name Meyer!**





# FARM WAGONS



All Meyer wagons (except 1704, 2004, & 2206) utilize reinforced elbow-type front spindles with camber for straighter trailing.

Steering arms are made of 1" plate steel.

8 & 10 bolt hubs are greasable.



Rugged tandem wings provide smooth ride and high floatation. Impressive 2 1/2" shafts attach wings on 1906 & 2206 models.



Meyer Model 1704, 2004, & 2206 feature a T style front spindle assembly and 3" (3.5" on 2004) spindles for your heaviest loads.


Notice the heavy duty, 1" tie rod attachment bolt. (Standard on all models except 804)



### Meyer Models:

1604    2004    1906  
1704                    2206

(Internal View) Feature thrust bearings and aluminum/bronze spindle sleeves.

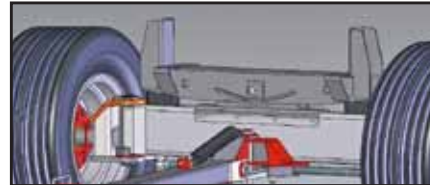

### Rocking Bolster Option

Available for:  
X1704 Single  
X2206 Tandem

## DIMENSIONS • SPECIFICATIONS • OPTIONS

Model	Capacity	Weight w/tires	Tread Width	Spindle Diameter	Hub Size	Bolster Size/Height	Reach Size	Wheel Base	Quick Hitch Pole	Pole Adj.	Hyd. Surge Brakes	Rear Hitch
<b>Single Axle:</b>												
804W	8 ton	900# w/11L	90"	1 3/4"	6 Bolt 3560#	4" x 8" tube 27" w/11L	4" wide x 88" L opt. 112"	93" to 141"	Standard w/spring asst.	82" - 100"	N/A	STD
1004	10 ton	1025# w/12.5L	76"	2"	6 Bolt 4570#	4" x 8" tube 28" w/12.5L	4" wide x 88" L opt. 112"	93" to 141"	Standard w/spring asst.	82" - 100"	N/A	STD
1304	13 ton	1640# w/14L	83"	2 3/4"	8 Bolt 6000#	4" x 8" tube 31" w/14L	5" wide x 112" L opt. 136"	117" to 165"	Standard w/spring asst.	97" - 115"	OPT	STD
1604	16 ton	1950# w/16.5L	88"	2 3/4"	8 Bolt 8000#	4" x 8" tube 32" w/16.5L	5" wide x 112" L opt. 136"	117" to 165"	Standard w/spring asst.	84" - 110"	OPT	STD
1704	17 ton	2610# w/Trk tires	85"	3"	8 Bolt 8000#	4" x 8" tube 34" w/Trk tires	5" wide x 112" L opt. 136"	117" to 165"	Standard w/spring asst.	84" - 110"	OPT	STD
X2004	20 ton	3250# w/Trk tires	86.5"	3 1/2"	10 Bolt 15000#	4"x10" tube 36 3/4" w/trk	5" wide x 112" L opt. 136"	117" to 165"	Standard w/spring asst.	84" - 110"	OPT	STD
<b>Tandem Axle:</b>												
1206	12 ton	1525# w/12.5L	76"	2"	6 Bolt 4570#	4" x 8" tube 28" w/12.5L	4" wide x 88" L opt. 112"	93" to 141"	Standard w/spring asst.	97" - 115"	N/A	OPT
1506	15 ton	2220# w/14L	83"	2 3/4"	8 Bolt 6000#	4" x 8" tube 31" w/14L	5" wide x 112" L opt. 136"	117" to 165"	Standard w/spring asst.	97" - 115"	OPT	OPT
1906	19 ton	2960# w/16.5L	88"	2 3/4"	8 Bolt 8000#	4" x 8" tube 32" w/16.5L	5" wide x 112" L opt. 136"	117" to 165"	Standard w/spring asst.	84" - 110"	OPT	OPT
2206	22 ton	3800# w/Trk tires	85"	3"	8 Bolt 8000#	4" x 8" tube **34" w/Trk tires +3" for riser	5" wide x 112" L opt. 136"	117" to 165"	Standard w/spring asst.	84" - 110"	OPT	OPT

### Options:

- Long Reach
- Safety Chain
- 3 or 4" Riser Package\*
- Rocking Bolster (X1704 & 2206)

\*Riser packages may be required for large diameter tires depending on application.

All running gear are designed for farm use at tractor speeds to a maximum of 20 mph. Capacities apply only when equipped with properly rated tires. Meyer Mfg. reserves the right to change its products or this description at any time without notice or obligation.

YOUR DEALER IS:



Scan this code with your smartphone and instantly visit us online!

## Meyer Mfg. Corp.

Dorchester, Wisconsin 54425

Phone: 715/654-5132 • FAX: 715/654-5513 • 1-800-325-9103  
email: sales@meyermfg.com • home page: www.meyermfg.com