

INDUSTRIAL

SXI 1050


“V” Spreader



669 cu.ft. struck / 5100 gals. Capacity



***Largest “V” Spreader in the Market!
To “Maximize” your productivity!***

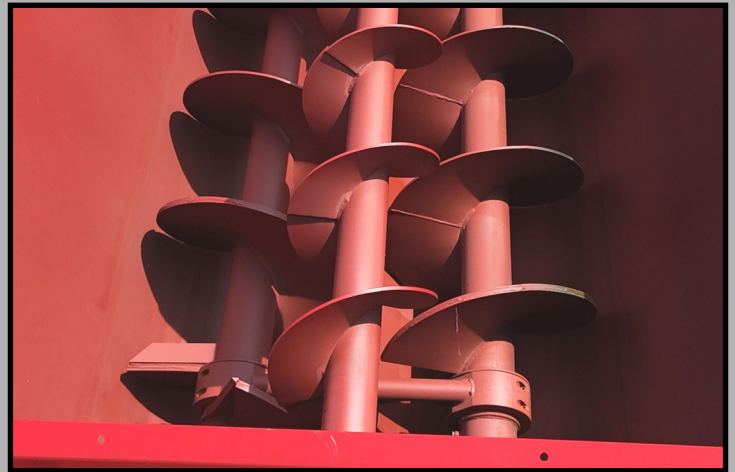

Larger 28” Lower Augers are shear bolt protected. Upper Auger runs in Reverse to De-Bridge the Load.



***Large 35” Diameter Expellers
“Massive” 36.5” x 63” Door Opening***



***HD Floatation Axle System Along with
Optional Hydraulic Lid (RH or LH)***

Trust The Name MEYER

MEYER SXI1050 Dimensions & Specifications

MEYER SXI1050	
	Industrial SXI1050 Trailer Type
CAPACITY:	
Bushels Heaped	1050
Gallons/Cu.ft. (struck)	5100 / 669
Cu. yards. (struck)	24.8 cu.yards
DIMENSIONS:	
Overall Length	31'
Inside Tank Length	20'
Loading Height	102.75" w/750/60R30.5
Overall Height	119.25" w/750/60R30.5
Overall Width	143" w/750/60R30.5 tires
Top Inside Tank Width	101"
SPECIFICATIONS:	
Total Weight	24,880#
Maximum Load Net (Lbs.)	50,000#
Lower Auger Diameter	28"
Lower Auger Flighting Thickness	3/8" sectional
Independent Lower Auger	Standard
Shear Hub Sprockets	
3rd Auger (solid material)	Standard - 16"
Drive - PTO-RPM	1000 RPM Constant Velocity 1 3/4-20 spline
Drive Line Protection	Overrunning cut out clutch w/shear bolt augers
Roller Chain Drive - Auger	#80 - #140
Belt Driven - Expeller	Banded V-Belt
Roller Chain Auto Oiler	Standard
Expeller Speed (RPM)	576 RPM
Expeller Diameter	35"
Tires	750/60R30.5
Hydraulic Drum Brakes	Standard 2-Wheel Drum Style
Articulating Ag Hitch	Standard CAT 3 / 4
TANK CONSTRUCTION:	
Thickness - Auger Troughs	1/4"
Thickness - Tank Sides	1/4"
Frame Construction	HD Formed Channel
Door Opening	36.5" x 63"
Spindle Diameter	5" Sleeved
High Flootation Axle	Standard - Tandem
Standard Axle Hub Size	N/A
High Flootation Axle Hub Size	10 bolt-25,000# (std.)
Splash Shields-Standard	Angled style front / rear
LED transport lights w/ag plug	Standard
Tractor Requirement	225 HP Tractor
PTO HP (Min.)	
OPTIONS:	
Hydraulic Lid	Optional
Poultry Litter Pkg / Auger Slow Down	Optional
Safety Chain	Optional
Variable Speed Auger Drive	N/A
Auto-Lube System	Optional
Clean Out Doors	Standard
Articulating Ag Hitch	Optional CAT 5 (In Lieu of Standard Hitch)

Phone No. 1-800-325-9103 meyerfmfg.com Contact us: sales@meyerfmfg.com